


Dynamische Receiver | Dynamic Receiver

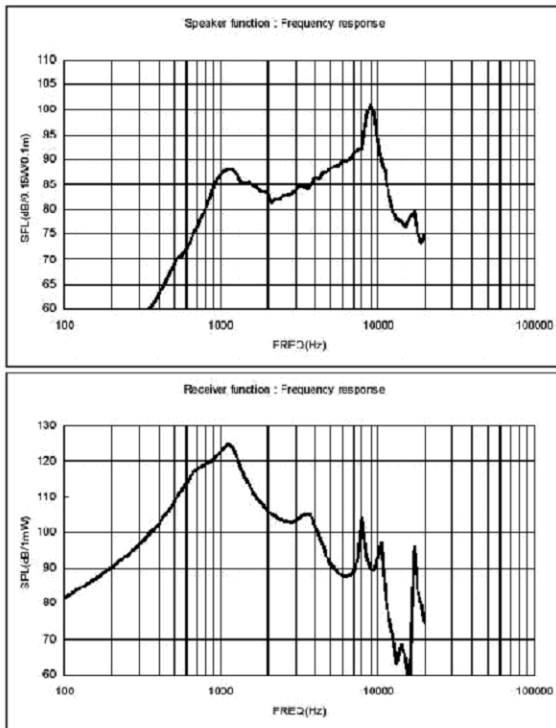

SPEZIFIKATIONEN / SPECIFICATIONS

MODEL	SCB-13A-LS2
SPL Lautsprecher / SPL Speaker	85 +/- 3 dB
SPL Receiver / SPL Receiver	122,5 +/- 3 dB
Impedanz / Impedance	8 ohm
Stromaufnahme / Rated Input	0,15 W
Resonanzfrequenz / Resonance Frequency	810 Hz
Betriebstemperatur / Operating Temperature	-30°C to +70°C
Lagertemperatur / Storage Temperature	-40°C to +85°C
Abmessungen / Dimension	Diameter 13 x Height 2,5 mm

Anderungen und Irrtümer vorbehalten | Rights reserved to change specifications without prior notice