


XENON BLITZLEUCHE SOLEX | XENON BEACON SOLEX

- Großer Spannungsbereich bis zu 60VDC
- Wide operating voltage range up to 60VDC
- Anlaufstrombegrenzung
- Current surge suppression
- Automatische Synchronisation
- Automatic synchronisation
- Hohe Effizienz
- High efficiency
- Konstante Leistung im gesamten Spannungsbereich
- Constant performance over voltage range
- Verschraubbarer Sockel
- Locking base
- Version mit Sabotage-Schutz Schalter erhältlich
- Tamper switch for security applications available
- Fünf Linsenfarben
- Five lens colours
- VDS Zulassung für Sorex
- VDS approval for Sorex

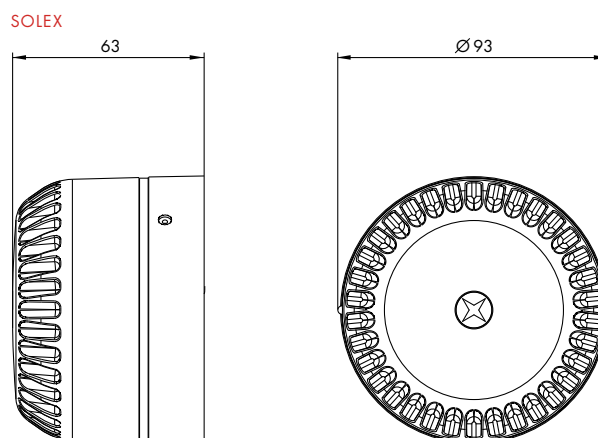

Höhe mit Deep Base | Height with Deep Base = 91mm
 Höhe mit U-Base | Height with U-Base = 94mm

SPEZIFIKATIONEN / SPECIFICATIONS

MODEL	Sorex 3	Sorex 10	Sorex 15
OPERATING VOLTAGE	10 - 60VDC*		
CURRENT CONSUMPTION	35mA @ 24VDC	80mA @ 24VDC	220mA @24VDC
LIGHT SOURCE	Xenon		
LIGHT OUTPUT	2.5Cd	10Cd	15Cd
FLASH RATE	1Hz +/- 20%		
OPERATING TEMPERATURE	-25°C to +70°C		
IP RATING	Shallow Base = IP54, Deep Base = IP65, U-Base = IP65		
LENS COLOURS	Red, Amber, Clear, Blue and Green		
BASE COLOURS	red or white		
WEIGHT	0.15 kg Shallow Base, 0.18 kg Deep/U-Base		
CONSTRUCTION	Base ABS FR Lens PC		
APPROVALS	VdS		

* Sorex 3 & 10 können mittels der Deep Powered Base auch bei 110 / 230VAC betrieben werden.

* Sorex 3 & 10 will operate from 110 / 230VAC when used with a Deep powered base.