



SPRACHSIRENE SYMPHONI VOICE PLUS | VOICE SOUNDER SYMPHONI VOICE PLUS

- Großer Spannungsbereich bis zu 60VDC
- Wide operating voltage range up to 60VDC
- Sehr gute Tonwiedergabe
- High sound output
- Sehr geringe Stromaufnahme
- Extremely low current consumption
- Lautstärkenregelung
- Volume control
- 8 wählbare Töne
- 8 User selectable alarm tones
- Speicherplatz für bis zu 16 Nachrichten
- 16 message store
- Nachrichten können über eine Computer-Schnittstelle manuell verändert werden
- Messages can be managed using a PC
- Keine EPROMs
- No EPROMs

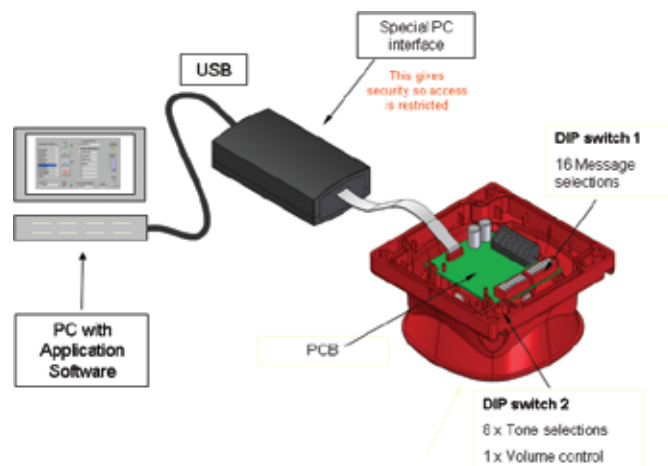

VOICE PLUS

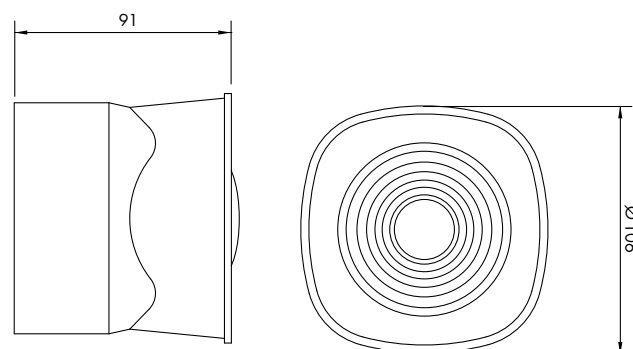

SPEZIFIKATIONEN / SPECIFICATIONS

TYPE	Symphoni Voice plus	
	Voice sounder	Voice sounder / beacon
OPERATING VOLTAGE	9Vdc to 60Vdc	
CURRENT CONSUMPTION	12mA @ 24vdc	12mA (sounder) + 4mA (beacon) @ 24Vdc
SOUND OUTPUT @ 1m	Tone 100dB(A) Voice 97dB(A) (Peak)	
VOLUME CONTROL	-10db (single setting by switch)	
MESSAGES	Up to 16 stored in the sounder	
ALARM TONES	7 (+ one setting with no tone)*	
BEACON OUTPUT		2Cd on axis @ 24Vdc
BEACON FLASH RATE		1Hz
BEACON COLOUR		Red flash
IP RATING	IP21C	
OPERATING TEMPERATURE	-10C to +55C	
COLOURS	Red body/Red lens White body/White lens (Red flash for both)	
MATERIAL	Body: ABS Lens: Polycarbonate	

* The silent position allows for situation where the tone may be recorded as part of the message